


## Micro-LM Guide RSR-M

### RSR-M 1 and 2

**PROTOTYPE**

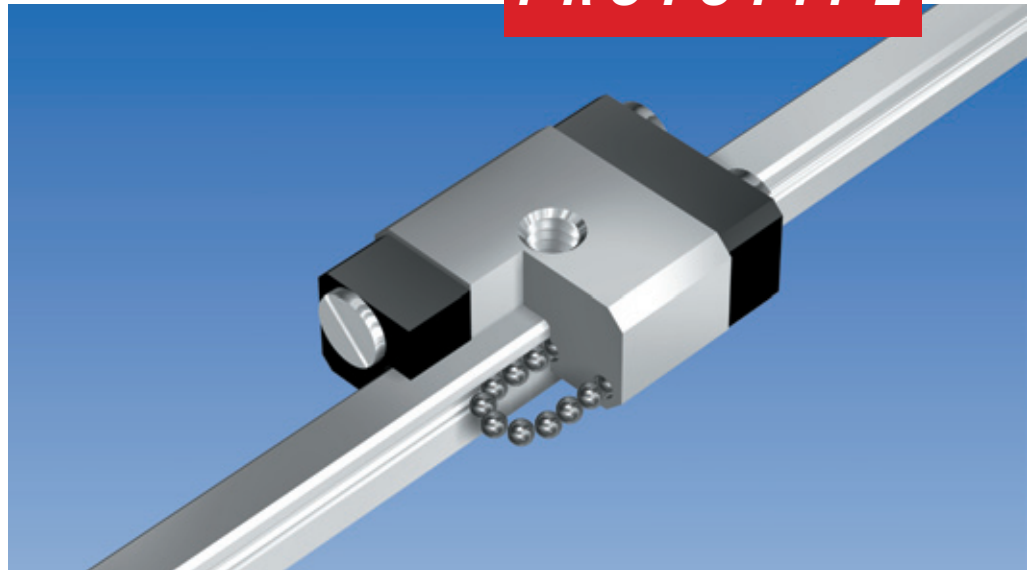

- **Smallest LM Guide worldwide**

The micro series of RSR type are miniaturized LM Guides for endless strokes. With the compact design of block and the integrated specific sized balls high rigidity in all load directions is achieved.


- **Capable of receiving loads in all directions**

These models are capable of receiving loads in all directions.

- **Highly corrosion resistant**

Since its LM block, LM rail and balls are made of stainless steel, this model is highly resistant to corrosion and therefore is suitable for applications in clean rooms etc.

- **Smooth motion with low rolling resistance**

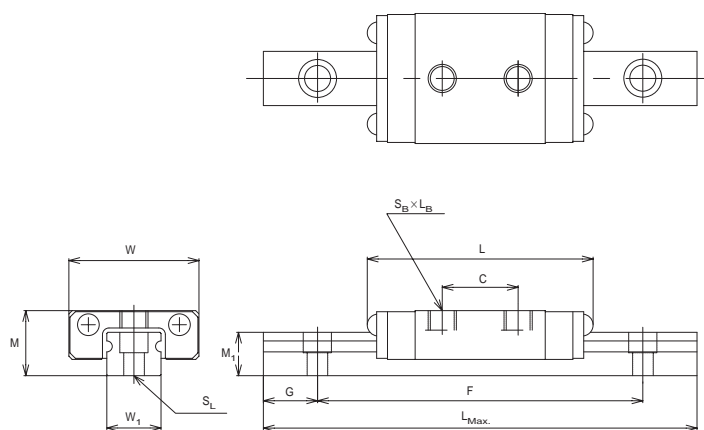


Unit: mm

Model No.	M	W	L	C	W <sub>1</sub>	M <sub>1</sub>	F	G	L <sub>Max.</sub>	S <sub>B</sub> × l <sub>B</sub>	S <sub>L</sub>	Basic load rating	
												C [N]	C <sub>0</sub> [N]
RSR1M	2.5	4	6.2	–	1	1.4	–	–	100	1-M1×1	–	37	58
RSR1WM	2.5	5	8.3	2.5	2	1.4	5	5	104	2-M1×1	Countersink S0.6	61	94
RSR2N	3.2	6	12.4	4	2	2	8	4	104	2-M1.4×1.1	Through M1	166	245
RSR2WN	4	10	17	6.5	4	2.6	10	5	180	2-M2×1.3	Countersink M1.6	307	435

# RSR-M1

## LM Guide High Temperature Type Model RSR-M1

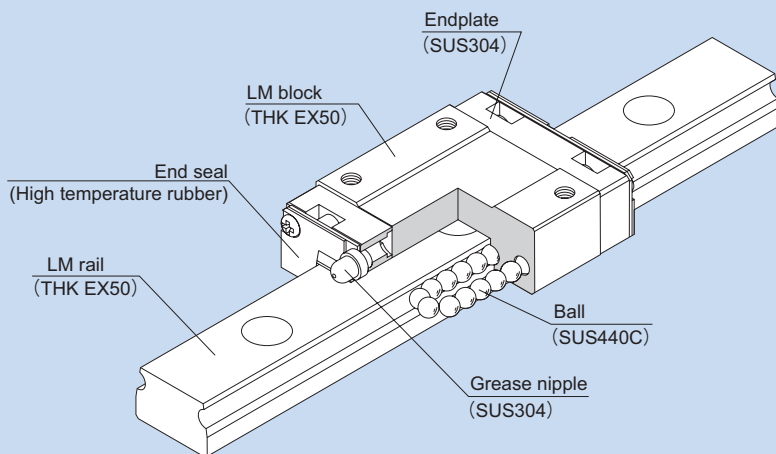

<b>Structure and Features</b>	▶▶▶ A-287
<b>Thermal Characteristics of LM Rail and LM Block Materials</b>	▶▶▶ A-287
<b>Types and Features</b>	▶▶▶ A-288
<b>Rated Loads in All Directions</b>	▶▶▶ A-289
<b>Equivalent Load</b>	▶▶▶ A-289
<b>Service Life</b>	▶▶▶ A-100
<b>Radial Clearance Standard</b>	▶▶▶ A-114
<b>Accuracy Standards</b>	▶▶▶ A-126
<b>Shoulder Height of the Mounting Base and the Corner Radius</b>	▶▶▶ A-332
<b>Error Allowance in the Parallelism between Two Rails</b>	▶▶▶ A-334
<b>Error Allowance in Vertical Level between Two Rails</b>	▶▶▶ A-337
<a href="#">Dimensional Drawing, Dimensional Table, Example of Model Number Coding</a>	▶▶▶ B-192
<a href="#">Standard Length and Maximum Length of the LM Rail</a>	▶▶▶ B-196

---

## Structure and Features

---

Balls roll in two rows of raceways precision-ground on an LM rail and an LM block, and endplates incorporated in the LM block allow the balls to circulate.

High temperature type miniature LM Guide model RSR-M1 is capable of being used at service temperature up to 150°C thanks to THK's unique technologies in material, heat treatment and lubrication.

### [Maximum Service Temperature: 150°C]

Use of stainless steel in the endplates and high temperature rubber in the end seals achieves the maximum service temperature of 150°C.

### [Dimensional Stability]

Since it is dimensionally stabilized, it demonstrates superb dimensional stability after being heated or cooled (note that it shows linear expansion at high temperature).

### [Highly Corrosion Resistant]

Since the LM block, LM rail and balls use stainless steel, which is highly corrosion resistant, this model is optimal for clean room applications.

### [High Temperature Grease]

This model uses high temperature grease that shows little grease-based fluctuation in rolling resistance even if temperature changes from low to high levels.

---

## Thermal Characteristics of LM Rail and LM Block Materials

---


- Specific heat capacity: 0.481 J/(g·K)
- Thermal conductivity: 20.67 W/(m·K)
- Average coefficient of linear expansion:  $11.8 \times 10^{-6}/^{\circ}\text{C}$

## Types and Features

### Models RSR-M1, RSR-M1K, M1V

Specification Table⇒B-198


This model is a standard type.

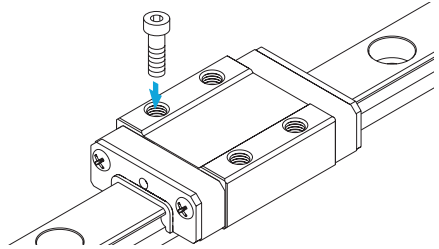

### Model RSR-M1N

Specification Table⇒B-198


It has a longer overall LM block length (L) and a greater rated load than standard types.

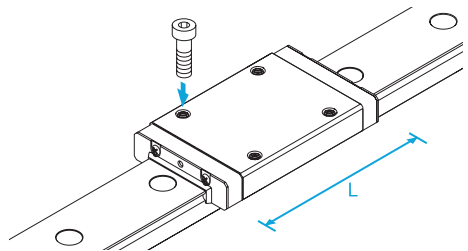

### Models RSR-M1W, M1WV

Specification Table⇒B-200


These models have greater overall LM block lengths (L), broader widths (W) and greater rated loads and permissible moments than standard types.

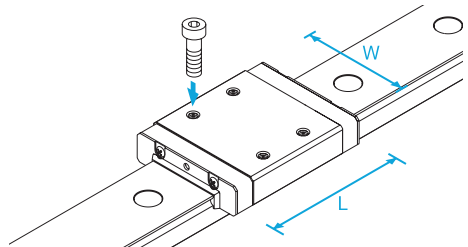

### Model RSR-M1WN

Specification Table⇒B-200

It has a longer overall LM block length (L), a greater rated load than standard types. Achieves the greatest load capacity among the high temperature type miniature LM Guide models.

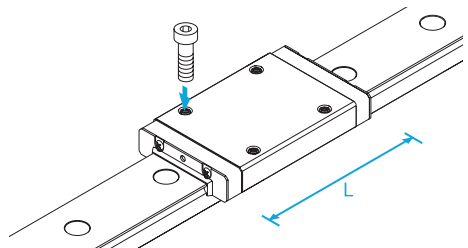

## Rated Loads in All Directions

Model RSR-M1 is capable of receiving loads in four directions: radial, reverse radial and lateral directions.

The basic load ratings of models RSR9M1/M1W are uniform in the four directions (radial, reverse radial and lateral directions), and their actual values are provided in the specification table for RSR-M1.

The basic load ratings of models RSR12M1 to 20M1 indicate the values in the radial direction in Fig.1, and their actual values are provided in the specification table for RSR-M1. The values in the reverse radial and lateral directions are obtained from Table1 below.




Table1 Basic Load Ratings of Models RSR12M1 to 20M1 in All Directions

Direction	Basic dynamic load rating	Basic static load rating
Radial direction	C	C <sub>0</sub>
Reverse radial direction	C <sub>L</sub> =0.78C	C <sub>0L</sub> =0.70C <sub>0</sub>
Lateral directions	C <sub>T</sub> =0.78C	C <sub>0T</sub> =0.71C <sub>0</sub>

## Equivalent Load

When the LM block of models RSR9M1/M1W receives loads in all four directions simultaneously, the equivalent load is obtained from the equation below.

$$P_E = P_R (P_L) + P_T$$

P<sub>E</sub> : Equivalent load (N)  
 : Radial direction  
 : Reverse radial direction  
 : Lateral direction

P<sub>R</sub> : Radial load (N)  
 P<sub>L</sub> : Reverse radial load (N)  
 P<sub>T</sub> : Lateral load (N)

When the LM block of models RSR12M1 to 20M1 receives loads in the radial and lateral directions, or the reverse radial and lateral directions, simultaneously, the equivalent load is obtained from the equation below.

$$P_E = X \cdot P_R (P_L) + Y \cdot P_T$$

P<sub>E</sub> : Equivalent load (N)  
 : Radial direction  
 : Reverse radial direction  
 : Lateral direction

P<sub>R</sub> : Radial load (N)  
 P<sub>L</sub> : Reverse radial load (N)  
 P<sub>T</sub> : Lateral load (N)

X, Y : Equivalent factor  
 (see Table2 and Table3)

Table2 Equivalent Factor of Models RSR12M1 to 20M1 (when radial and lateral loads are applied)

P <sub>E</sub>	X	Y
Equivalent load in the radial direction	1	0.83
Equivalent load in lateral direction	1.2	1

Table3 Equivalent Factor of Models RSR12M1 to 20M1 (when reverse radial and lateral loads are applied)

P <sub>E</sub>	X	Y
Equivalent load in reverse radial direction	1	0.99
Equivalent load in lateral direction	1.01	1

---

## **Service Life**

---

For details,see A-100.

---

## **Radial Clearance Standard**

---

For details,see A-114.

---

## **Accuracy Standards**

---

For details,see A-126.

---

## **Shoulder Height of the Mounting Base and the Corner Radius**

---

For details,see A-332.

---

## **Error Allowance in the Parallelism between Two Rails**

---

For details,see A-334.

---

## **Error Allowance in Vertical Level between Two Rails**

---

For details,see A-337.